

ELLIPSE

Free-standing manual bio-fireplace

ELLIPSE



ELLIPSE Free standing floor model

Introducing the ELLIPSE Bio-Fireplace, a stunning free-standing design that combines artistic elegance with superior engineering. Its extended oval base and delicate bent glass panes create a captivating visual display that enhances any space.

The ELLIPSE® Bio-Fireplace offers a single size configuration and an array of color customization options to perfectly align with your personal style and decor. It features a body constructed from durable MDF board, finished with a high-gloss paint that captures and reflects light, enhancing the visual impact of its sleek design. Available in classic tones such as deep Red, crisp White, and elegant Black, the ELLIPSE® can also be tailored in any preferred hue to match or accentuate your interior color scheme.

SAFE CONTROL

A thoughtfully designed safety chamber offers peace of mind by providing thermal insulation and ensuring any spilled bioethanol remains safely outside the combustion area. Handy indicators make bioethanol measurement a breeze.

ECO HEATER

Experience cleaner, more mesmerizing flames with our unique V-shaped tank and catalyst insert. Adjust the flames effortlessly with a safety-first cold handle.

Warranty

All Bio-fireplaces undergo a thorough quality control process, which includes a leak test to ensure their safety and performance.


**Manufactured and tested according to European Standard
EU norm EN 16647 Predicate to test report no. 3515 A1 21**

Note: All calculations and figures presented are based on controlled testing and should be considered as theoretical

MODEL	ELLIPSE
Dimensions in mm L /D/ H	1400/440/600
Burner options: COLOR: stainless or black glossy enamel RAL 9017	ARTFLAME 500
ARTFLAME burner tank capacity	2,0L
ARTFLAME Flame control	Manual (stainless steel cold handle)
ARTFLAME Amount of ethanol combusted at maximum opening /hour	0.6 L/h
Combustion time	up to 6 h
ARTFLAME Maximum heat at maximum opening/hour kW/h or BTU/h	3,1 kW/h or 11000 BTU/h
Calorific value of fuel /with consumption of 1 L bioethanol (7,4 kW/kg x 0,789 kg/L = 5,839kW/L & 19,920 BTU/L)	5,839 kW/L & 19,920 BTU/L
Net weight without bioethanol	55,0 kg
Minimal room size m ³ (desired temp. increase with 5°C) & heating area capacity 0,1kW per 1m ² for well-insulated space	70 m ³ & 35m ²

** Nm³ stands for m³ of gas in normal conditions (101235 Pa) The value includes the moisture content of ambient air 50% relative humidity Rh*

1. ELLIPSE stainless steel support
2. ELLIPSE body made from MDF painted with high gloss paint
3. Magnetic concealed latches NEO PRO
4. ARTFLAME 500 burner
5. Curved OPTIWHITE glass

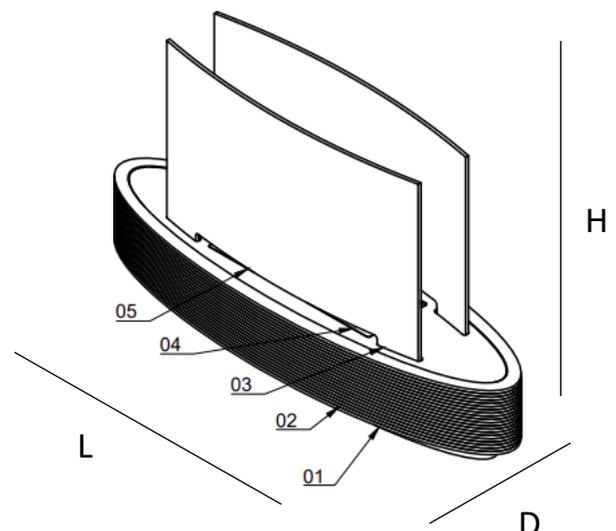

INDUSTRIAL
DESIGN



EASY
ASSEMBLY



FUEL
EFFICIENCY



FLAME
CONTROL



SECURE COMBUSTION
CHAMBER