



EU CLASS
NORM



100%
ORIGINAL
by BIOPASJA

HYGGE

Free-hanging manual bio-fireplace

HYGGE



HYGGE Free-hanging or Ceiling Bio-Fireplace

The HYGGE bio-fireplace, showcasing an elegant openwork design, transcends mere functionality to become a statement piece that embodies modern Scandinavian aesthetics. The intricate aluminium openwork not only enhances visual appeal but also improves the functionality of the piece, allowing it to blend seamlessly into various settings and styles. Whether ceiling-hung or freely suspended, the HYGGE adapts effortlessly, ensuring safety and efficiency. The sophisticated design harmonizes with any modern living environment, offering both practical functionality and stunning visual elements. The openwork facilitates a mesmerizing view of the flames, enhancing both the aesthetic appeal and the warmth of any room it graces. More than just an appliance, the HYGGE bio-fireplace stands as a central piece of art, enhancing any setting it occupies.

SAFE CONTROL

A thoughtfully designed safety chamber offers peace of mind by providing thermal insulation and ensuring any spilled bioethanol remains safely outside the combustion area. Handy indicators make bioethanol measurement a breeze.

ECO HEATER

Experience cleaner, more mesmerizing flames with our unique V-shaped tank and catalyst insert. Adjust the flames effortlessly with a safety-first cold handle.

Warranty

All Bio-fireplaces undergo a thorough quality control process, which includes a leak test to ensure their safety and performance.


**Manufactured and tested according to European Standard
EU norm EN 16647 Predicate to test report no. 3515 A1 21**

Note: All calculations and figures presented are based on controlled testing and should be considered as theoretical

MODEL	HYGGE
Dimensions without profile edges in mm (H)	Custom
Burner options: Quadrad stainless or black glossy enamel RAL 9017	Stainless steel or black
Quadrad burner tank capacity	3,6L
Quadrad Flame control	Manual stainless cold handle
Quadrad Amount of ethanol combusted at maximum opening /hour	0.6 L/h
Combustion time	up to 6 h
Quadrad Maximum heat at maximum opening/hour kW/h or BTU/h	3,5 kW/h or 12000 BTU/h
Calorific value of fuel /with consumption of 1 L bioethanol (7,4 kW/kg x 0,789 kg/L = 5,839kW/L & 19,920 BTU/L)	5,839 kW/L & 19,920 BTU/L
Quadrad Net weight without bioethanol	58,0 kg
Minimal room size m ³ (desired temp. increase with 5°C) & heating area capacity 0,1kW per 1m ² for well-insulated space	70 m ³ & 35m ²

** Nm³ stands for m³ of gas in normal conditions (101235 Pa) The value includes the moisture content of ambient air 50% relative humidity Rh*

Ø 200mm or custom

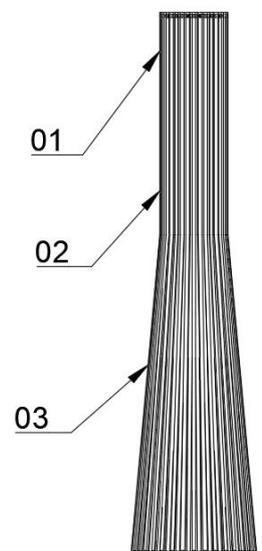

Ø 390mm or custom

1. HYGGE Free-hanging or Ceiling Bio-Fireplace
2. Aluminium Openwork Design, powder coated black RAL 9005
3. HYGGE can be configured to the custom diameter or dimensions

H



INDUSTRIAL
DESIGN



EASY
ASSEMBLY



6h
FUEL
EFFICIENCY



FLAME
CONTROL



SECURE COMBUSTION
CHAMBER