

LYKKE

CEILING hanging bio-fireplace

LYKKE



LYKKE Ceiling model

Introducing the LYKKE BioFireplace, where sleek Scandinavian design meets eco-friendly warmth. Inspired by the Danish concept of happiness, LYKKE brings a cozy, inviting atmosphere to any room without the need for a chimney. Enjoy the beauty of real flames and a touch of Nordic charm with the LYKKE BioFireplace.

LYKKE fireplace is ceiling-mounted fireplace that offers a modern and unique design with its tube that suspends from the ceiling, coming to a harmonious petal, perfect for contemporary spaces. It features the option to be fixed or mounted on rotatable 360-degree hinges for adjustable viewing. Also possibility to choose the heart of the fireplace with an manual ARTFLAME burner or a vapor unit.

SAFE CONTROL

A thoughtfully designed safety chamber offers peace of mind by providing thermal insulation and ensuring any spilled bioethanol remains safely outside the combustion area. Handy indicators make bioethanol measurement a breeze.

ECO HEATER

Experience cleaner, more mesmerizing flames with our unique V-shaped tank and catalyst insert. Adjust the flames effortlessly with a safety-first cold handle.

Warranty

All Bio-fireplaces undergo a thorough quality control process, which includes a leak test to ensure their safety and performance.


Manufactured and tested according to European Standard
EU norm EN 16647 Predicate to test report no. 3515 A1 21

Note: All calculations and figures presented are based on controlled testing and should be considered as theoretical

1. Steel tube \varnothing 256mm height 1452* mm can be adjusted
2. Curved glass painted (RAL palette) OPTIONAL
3. LYKKE powder coated according to RAL palette
4. ARTFLAME 400 burner/Vapor unit
5. OPTIWHITE glass
6. Magnetic concealed latches NEO PRO

MODEL	LYKKE
Dimensions in mm Tube: \varnothing diameter/L Body: L/D/H	\varnothing 256/1456* 1300/500/700
Burner options: ARTFLAME COLOR: stainless or black glossy enamel RAL 9017	ARTFLAME 400 VAPOR UNIT 400
ARTFLAME burner tank capacity	3,6L
ARTFLAME Flame control	Manual (stainless steel cold handle)
ARTFLAME Amount of ethanol combusted at maximum opening /hour	0.6 L/h
Combustion time	up to 6 h
ARTFLAME Maximum heat at maximum opening/hour kW/h or BTU/h	3,5 kW/h or 12000 BTU/h
Calorific value of fuel /with consumption of 1 L bioethanol (7,4 kW/kg x 0,789 kg/L = 5,839kW/L & 19,920 BTU/L)	5,839 kW/L & 19,920 BTU/L
Net weight without bioethanol	55,0 kg
Minimal room size m ³ (desired temp. increase with 5°C) & heating area capacity 0,1kW per 1m ² for well-insulated space	70 m ³ & 35m ²

* Nm³ stands for m³ of gas in normal conditions (101235 Pa) The value includes the moisture content of ambient air 50% relative humidity Rh

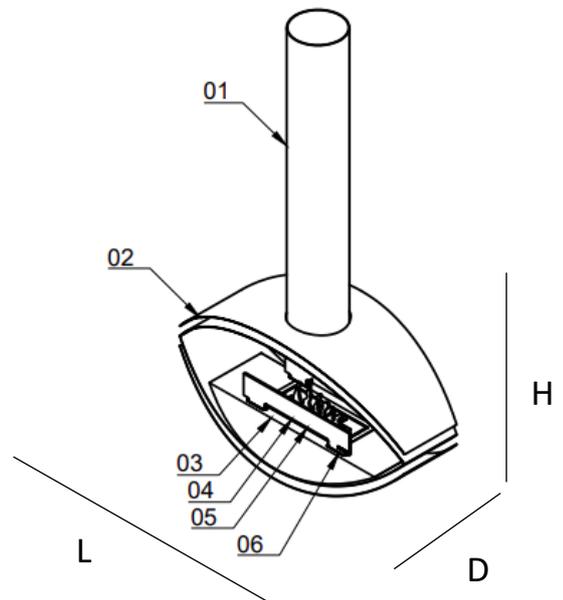

INDUSTRIAL DESIGN



EASY ASSEMBLY



FUEL EFFICIENCY



FLAME CONTROL



SECURE COMBUSTION CHAMBER